


French Wall Instructions for 7 ft. Mesh Panel


PARTS LIST:

- | | |
|-----------------------------------|-----------------------------------|
| (2) No-color Pole male pole – 61" | (1) Red-coded female Pole – 54 ¼" |
| (1) 22 ½" female pole section | (2) 50 ¼" telescoping leg |
| (1) Offset Leg Joint | (1) Long Ell Joint |
| (1) Door Ell Joint | (2) Canopy Foot |
| (2) StaBar Ell Joint | (2) Black ball bungee |




ASSEMBLY:

1. While assembling the roof frame (for a canopy) or the upper horizontal poles (for an indoor booth), slide the offset leg joint and the long Tee joint onto the upper horizontal poles opposite each other. See diagram below.

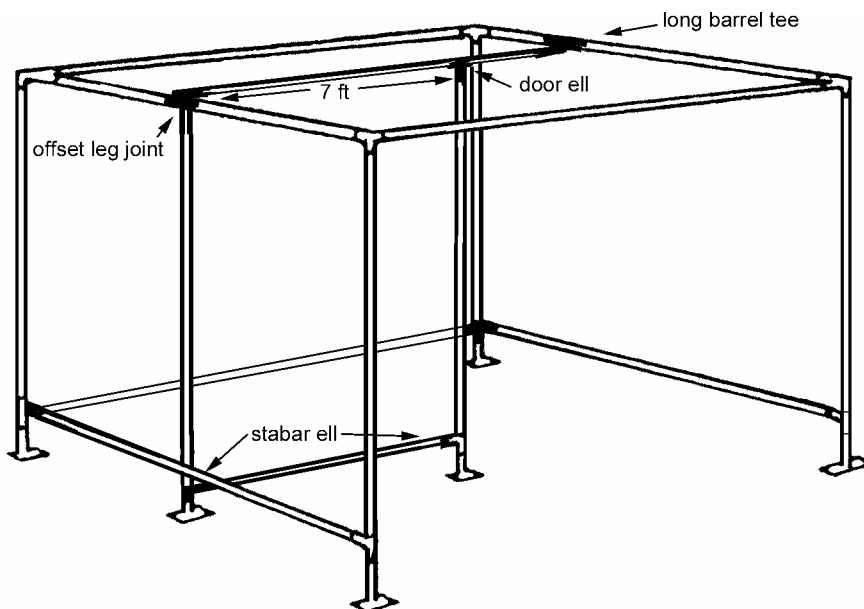

2. After canopy or indoor booth frame is completely assembled, insert the red-coded end of the assembled light pole (1 no color male and 1 red coded female with door ell) as far as possible into the long Tee Joint.
3. Slide the pole the other direction into the opposite offset leg Joint until it clicks into place.
4. Assemble two legs as per canopy or booth frame instructions, with a StaBar ell on each leg bottom. Slide one leg into the down barrel of the offset leg joint, and one into the door ell.
5. Assemble a 7' StaBar pole using one no color male and one 22 ½" female pole section. Slide the 7' StaBar pole into each of the two StaBar ells on the leg bottoms.
6. Attach 7' Mesh Panel

Instructions for Using Your Telescoping Legs

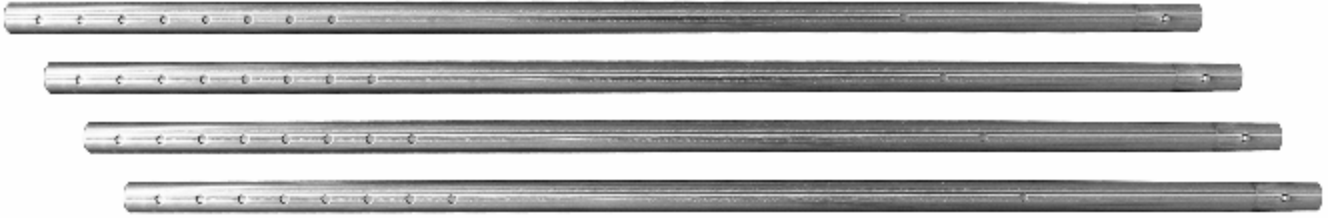

Your telescoping legs will arrive to you in the “collapsed” position with the inner “bottom” section completely inside the outer “top” section – see photo above.

To begin, grasp the top section firmly and shake downwards to slide the bottom section out slightly.

1. Note that there is a hole near the top of the outer section well above the long row of holes. Pull the inner section out about 6 inches and rotate until the snap button at the top of the inner section finds that hole and clicks into place.
2. If you are using your legs for a TrimLine canopy or a Mesh Panel Booth Frame you may slide your StaBar Ell or StaBar 3 way fittings onto the leg bottom before attaching the foot.
3. Slide a foot onto each leg and rotate until the snap button in the leg clicks into the snap button hole in the foot.
4. The telescoping leg is designed so that in the “collapsed” position you may keep the foot and/or the StaBar fittings on the leg when transporting them.
5. To extend the leg for use it's handy to use your toe to hold the foot plate down while lifting the outer section. Lift up until a snap button pops out from the inner section.
6. You may then rest the upper section on this snap button while you rotate the inner section until another snap button clicks into the topmost hole in the long row of holes. This is the extended position. From there you may simply extend the leg one hole at a time to reach the desired height or to account for uneven terrain in outdoor uses.
7. To collapse the leg simultaneously push in the “rest” snap button and the snap button in the long row of holes, and slightly rotate the inner section so the snap button does not catch in each hole on the way down.

