


Rear Door Frame

for the EZ Up and other Pop Up Canopies

Assembly Instructions


Parts:

- (6) Thumbscrews
- (1) StaBar Ell Joint
- (1) Door Ell Joint
- (1) EZ StaBar Ell Joint
- (1) Foot
- (1) Female pole section – 22 ½" long
- (1) Telescoping Leg, bottom nested inside top section

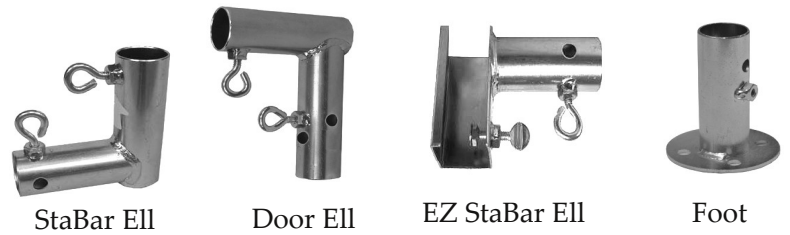

***Note – The rear door frame requires the use of both Upper and Lower StaBars.**

1. **While installing rear Upper StaBar**, slide Door Ell onto Upper StaBar and place in approximate position 3 feet from corner.
2. Assemble Leg (basic instructions on reverse) by sliding the StaBar Ell onto the bottom with it's white arrow pointing up, followed by the foot.
3. Insert the leg assembly into the Door Ell and click into place.

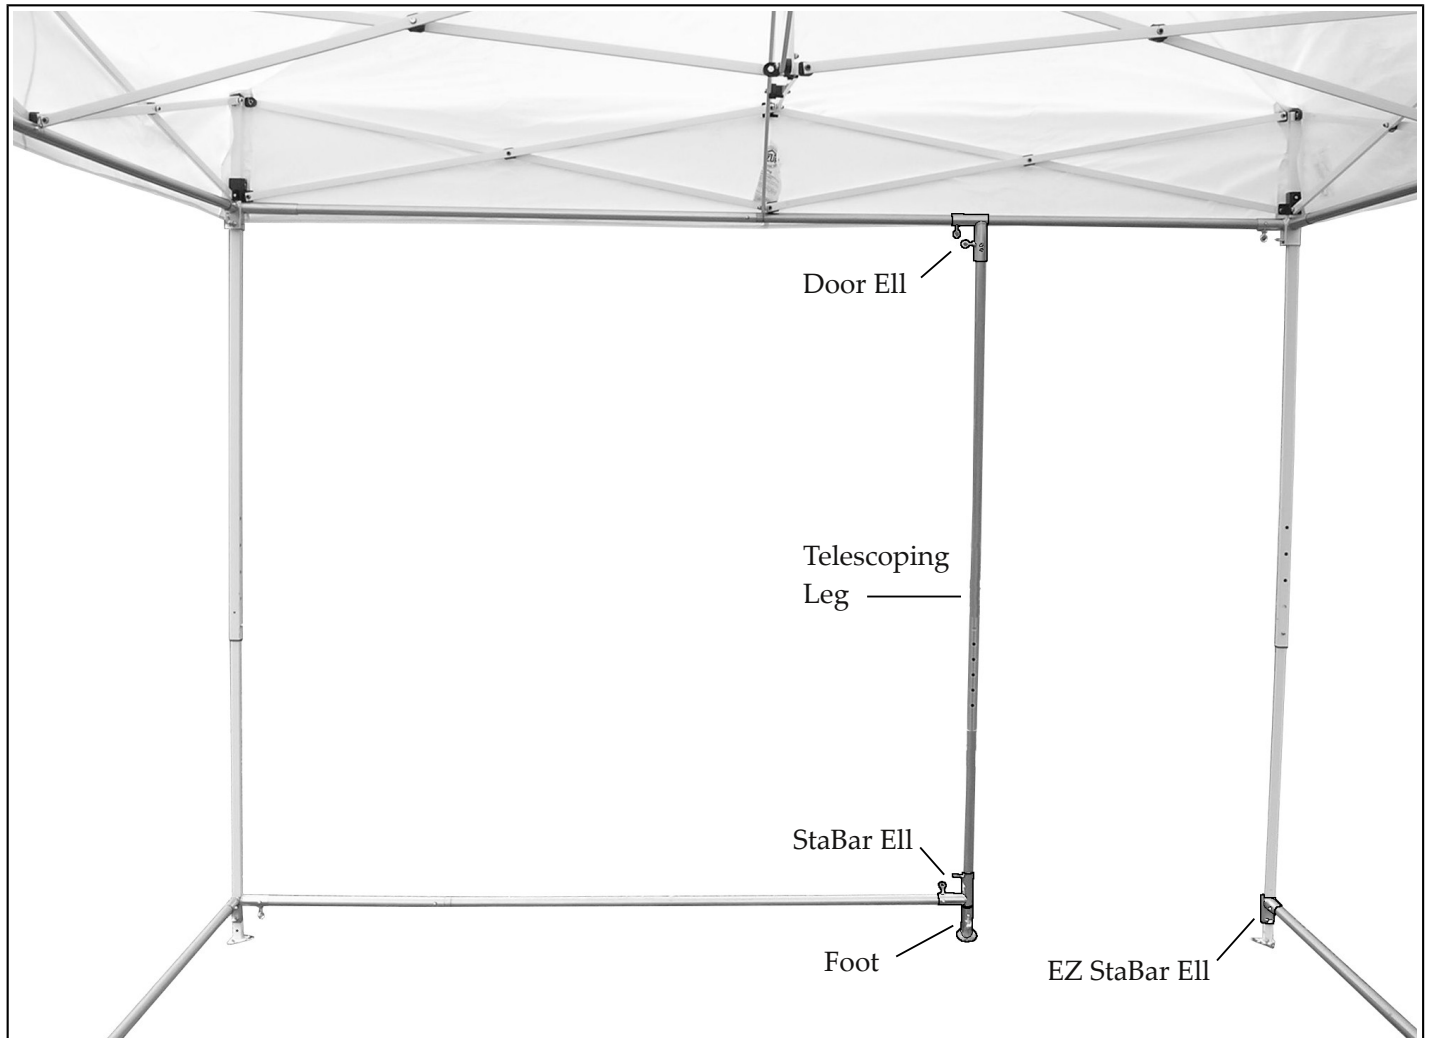

4. Assemble a 7 foot StaBar pole by clicking the 22 ½" female pole to a male pole section from your lower StaBar kit. Form two more StaBars at 10 feet long, following the separate directions for the Lower StaBar kit.
5. Attach Lower StaBars, beginning with the rear wall and adjusting the position of the Rear Door leg as needed to be able to click the 7 foot StaBar pole into the StaBar Ell on the leg and the EZ StaBar 3 Way at the corner.
6. Use the EZ StaBar Ell on the other rear canopy leg to receive the side StaBar.
7. Finger-tighten all thumbscrews – **do not use tools**.

Setting Up and Using the Telescoping Leg

1. Begin by holding leg upright, with the row of holes towards the bottom of the leg. Line up the snap button at the very bottom with the row of holes, then start pulling the inner nested section of the leg out until a button pops into place in the row of holes. Adjust so that button is engaged in lowest hole.
3. Slide the StaBar Ell and Foot onto the bottom of the leg, snapping the button on the leg into the hole on the foot.

At this point the leg assembly is ready for transport or storage. There is no need to remove joints between shows.

4. To extend the leg, hold upright on the floor and step on the footplate to keep the bottom section in place. Disengage the "travel" button, but keep the sections aligned. Now lift the top section upwards until a button pops out of the topmost of the row of height adjustment holes.
5. To increase the height of the leg depress the button in the row of holes and move up one click at a time to reach the desired height or to level the canopy on uneven terrain.
6. To collapse the leg, push in the snap button in the row of height adjustment holes and slide sections together. To keep the sections from sliding apart in transport, re-engage the "travel" button in the lowest hole.

