


# TrimLine Double Awning

## Assembly Instructions

\*Your double awning may be used on either 20ft side of your 10x20 Trimline canopy

### PARTS LIST:

- (3) LD Ell joints (Black arrows and Thumbscrews)
- (2) Awning Ell Joints
- (1) Awning Tee Joint
- (6) Thumb-screws
- (8) 6" White Ball Bungees
- (2) 10" White/Black Ball Bungees for center joint
- (3) Poles (coded AWN) - snap-buttons at each end
- (2) Male pole section – 61"
- (2) Female Pole Section – 58 1/4"
- (2) Vinyl Awning Cloth with grommets and zippers
- (1) Vinyl Joiner Tarp
- (2) Black Ball Bungees for bundling poles

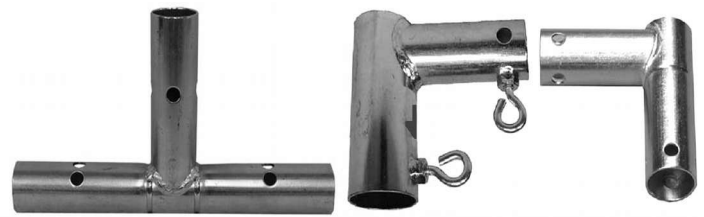

Awning Tee


LD Ell  
(with black  
arrow)

Awning Ell

1. While assembling the canopy, **before attaching legs to canopy frame**, slide LD Ell joints onto the upper leg sections of three legs on the side where you would like the awning (black arrows point down). Loosely tighten thumbscrews to keep joint from sliding during set-up.

2. Complete assembly of the Canopy.



3. Slide the LD Ell joints to the top of legs, without allowing them to slide up over the canopy corner joint. Point the open barrel outward and finger tighten the thumbscrews against the legs. Slide the "AWN"-coded poles into the Ells.

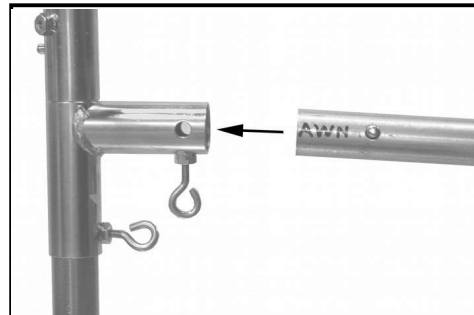

4. Attach Awning Ells to the no-color 116 1/2" pole.

5. Slide Ells onto protruding Awning poles to complete frame.

Note: Do not slide your LD Ells off the leg and onto the corner joint. The LD Ell should be positioned as pictured, no higher.

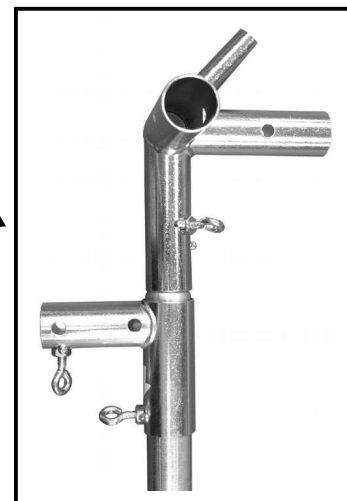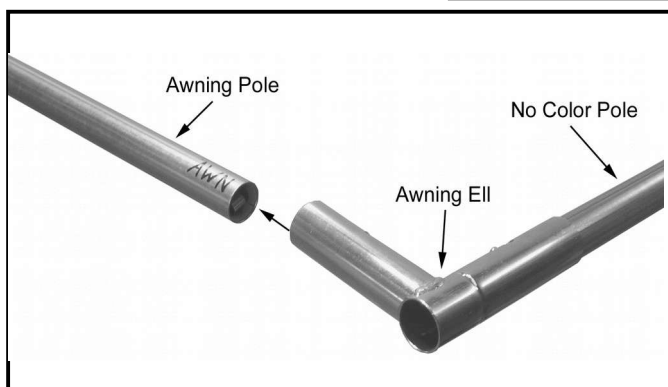


6. Zip Awning cloth to canopy roof (same zipper that you would use to attach a side-wall) and secure Velcro straps to the upper horizontal pole of the canopy.




7. Attach front edge of awning cloth to outer pole of frame using the white ball bungees.

At the corners, pull the loop around both angles of the joint at once and loop around ball.


In the center, use the two longer white/black bungees, wrapping over and around the Tee Joint, as shown.




Corners

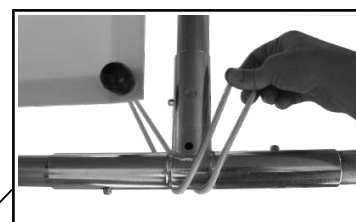

Center – step 1

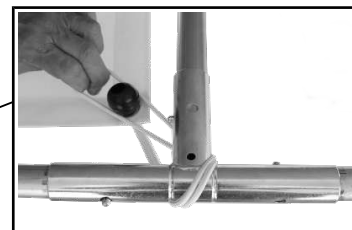


Center – step 2

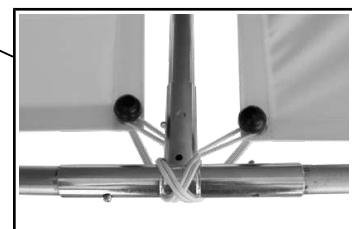

Center – step 3



8. With the awning in place, adjust the Velcro at the corners of the canopy to allow the valence to lay smoothly over the awning.



In-line

### **A note on using awnings on adjacent sides of your canopy:**

If you will be using two awnings, you may wish to substitute a 3-way joint for the ells in the shared corner. If you would like wrap around coverage, we offer an Awning Corner Cloth that simply Velcros into place to bridge the space between the two awnings.



3-way Joint



Awning Corner Cloth

### **Using your canopy sidewalls with Awnings:**

You will find a second zipper on the awning that you can use to attach your sidewall. Although the walls will NOT zip together at the corners with the awning frame in place, there are other options for closing up.

- a. You may use the windstraps on the walls to attach them to the legs during business hours and then take your awning frame down in order to zip up securely at night. (Remove poles, loosen thumbscrews and swivel joints towards the interior of the canopy.)
- b. Our optional **Awning Zipper Strips** allow the sides to be zipped together without removing the awning frame.